

IMPORT SINGLE



AVAILABLE MATERIALS

- Diecast zinc alloy

FEATURES/ADVANTAGES

- Medium loads under dead, variable or vibratory conditions in all types of solid masonry
- Available in single version (1 expander nut) or double version (2 expander nuts)
- Female threads accept standard UNC bolts or threaded rods

APPROVALS/LISTINGS

- G.S.A. Spec A-A-1923A, CID TYPE 2
- Contact customer service for approvals

ORDER DETAIL

Order Code	Bolt Dia.	Hole Dia.	Shield Length	Ultimate Loads in Lbs. 3000 P.S.I.		Box Qty.	Master Qty.
				Tension	Shear		
6104000	1/4"	1/2"	1-5/16"	2,410	1,750	100	800
6105000	5/16"	5/8"	1-1/2"	2,620	2,400	50	400
6106000	3/8"	5/8"	1-1/2"	4,950	3,180	50	400
6108000	1/2"	7/8"	2-3/16"	7,550	6,500	50	150

IMPORT DOUBLE



FEATURES/ADVANTAGES

- Medium loads under dead, variable or vibratory conditions in all types of solid masonry
- 2 expander nuts; also available in single version with 1 expander nut
- Female threads accept standard UNC bolts or threaded rods

APPROVALS/LISTINGS


- G.S.A. Spec A-A-1923A, CID TYPE 3
- Contact customer service for approvals

ORDER DETAIL

Order Code	Bolt Dia.	Hole Dia.	Shield Length	Ultimate Loads in Lbs. 3000 P.S.I.		Box Qty.	Master Qty.
				Tension	Shear		
6204000	1/4"	1/2"	1-3/8"	2,820	2,250	100	800
6205000	5/16"	5/8"	1-3/16"	2,990	2,740	100	500
6206000	3/8"	3/4"	2-1/16"	5,995	3,610	50	250
6208000	1/2"	7/8"	2-1/2"	9,140	7,345	25	125
6210000	5/8"	1"	3"	12,050	10,700	50	100

INSTALLATION

- 1 Drill recommended diameter hole to depth of shield.
- 2 Clean hole of debris.
- 3 Insert shield in hole threaded end first and tap with hammer for proper positioning.
- 4 Place equipment over shield. Insert machine bolt through equipment into shield and tighten.

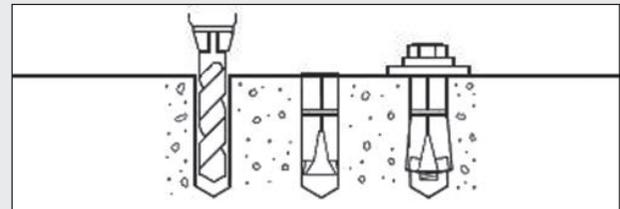

SELF-DRILLING WALLBOARD

AVAILABLE MATERIALS

- Zinc diecast alloy
- High strength nylon



CONSIDERATIONS

- Hollow wall anchoring only

FEATURES/ADVANTAGES

- Works in any wallboard thickness
- Can be easily backed out
- Low profile head
- Fast, easy installation
- Zinc Anchor can be set with a 1/4" hex bit tip

ORDER DETAIL

Order Code	Description	Maximum Fixture Thickness	1/2" Drywall			
			Tension	Shear	Box Qty.	Master Qty.
8561000	Plastic	3/4"	81	150	100	1200
* 8561100	Plastic Kit	3/4"	81	150	1	12
8571000	Zinc	3/4"	90	150	100	1200
* 8571100	Zinc Kit	3/4"	90	150	1	12

*Includes 50 #8 x 1-1/4" Screws and 50 Anchors

INSTALLATION

- 1 Place driving tool in anchor and puncture wallboard with anchor point.
- 2 Screw anchor clockwise applying forward pressure until head is flush to wall.
- 3 Place fixture over hole and tighten #8 or #10 sheet metal screw.

