


# SUP-R-BOLT STAINLESS-STEEL

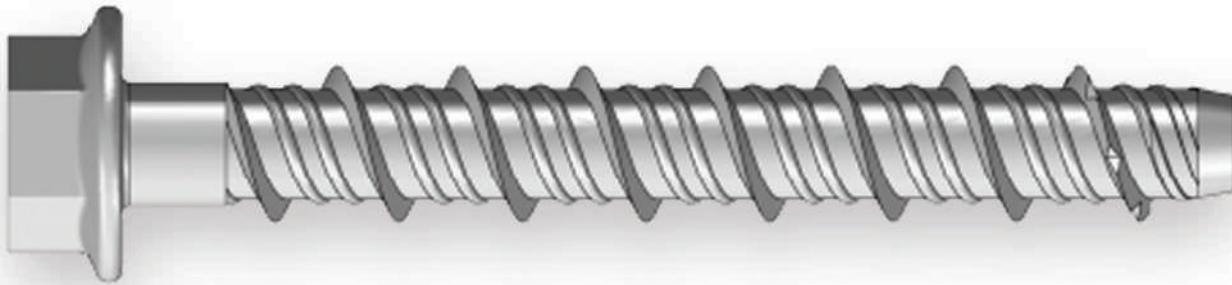

## FEATURES / ADVANTAGES

- Required hole diameter equals anchor diameter
- Designed for standard ANSI tolerance drill bits
- Hardened threads for tapping high strength concrete
- Anti-rotation teeth on underside of hex washer head lock against the fixture
- Can be installed closer to the edge than traditional expansion anchors
- Fast installation with powered impact wrench
- Diameter, length and identifying marking stamped on head of each anchor
- One-piece, finished head design
- Equipment can be removed
- Able to resist seismic loads
- Removable anchor with a low profile head

## ORDER DETAIL

Order Code	Description
4314134	1/4" X 1-3/4" SUP-R-BOLT 316SS
4314200	1/4" X 2" SUP-R-BOLT 316SS
4314300	1/4" X 3" SUP-R-BOLT 316SS
4314400	1/4" X 4" SUP-R-BOLT 316SS
4338134	3/8" X 1-3/4" SUP-R-BOLT 316SS
4338212	3/8" X 2-1/2" SUP-R-BOLT 316SS
4338300	3/8" X 3" SUP-R-BOLT 316SS
4338400	3/8" X 4" SUP-R-BOLT 316SS
4338500	3/8" X 5" SUP-R-BOLT 316SS
4338600	3/8" X 6" SUP-R-BOLT 316SS
4312300	1/2" X 3" SUP-R-BOLT 316SS
4312400	1/2" X 4" SUP-R-BOLT 316SS
4312500	1/2" X 5" SUP-R-BOLT 316SS
4312600	1/2" X 6" SUP-R-BOLT 316SS
4312800	1/2" X 8" SUP-R-BOLT 316SS

## APPROVALS / LISTINGS

- ICC ESR-4347
- ICC ESR-5359 - Masonry
- ACI 318 category 1 for cracked concrete