


UNI-TAP

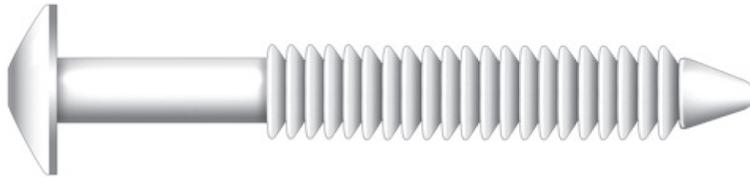

MKTfasteningUSA.com

501-676-2222 | info@MKTfasteningUSA.com

1 Gunnebo Drive · Lonoke, AR 72086

AVAILABLE MATERIALS

- High strength nylon
- Available in Bulk Pack

APPROVALS / LISTINGS

- G.S.A. Spec A-A-1925A, CID Type 3
- Contact customer service for approvals

FEATURES / ADVANTAGES

- Light to medium loads under dead, variable or vibratory conditions, in solid or hollow masonry
- Impervious to moisture
- Quick and easy to install
- Can be used in a bottomless hole

CONSIDERATIONS

- Drill recommended hole diameter



ORDER DETAIL

Order Code	Size	Masonry	Wood / Metal	Head Diameter	Grip Range	Tension Hollow Wall	Shear Hollow Material	Tension Cement Block	Head Style	Box Qty.	Master Qty.
6460000	9/32" x 1"	1/4"	9/32"	5/8"	3/16-1/2"	130	250	150	TRUSS	100	1200
6660000	9/32" x 1-5/8"	1/4"	9/32"	5/8"	3/8-1 1/8"	130	253	158	TRUSS	100	800
6760000	9/32" x 2-1/8"	1/4"	9/32"	5/8"	7/8-1 5/8"	130	274	154	TRUSS	100	800
6860000	9/32" x 2-5/8"	1/4"	9/32"	5/8"	1 3/8-2 1/8"	130	238	163	TRUSS	100	500
6960000	9/32" x 3-1/8"	1/4"	9/32"	5/8"	1 7/8-2 5/8"	130	228	150	TRUSS	100	500

INSTALLATION

- 1 Drill hole slightly deeper than fastener length.
- 2 Clean hole of debris.
- 3 Tap "Uni-Tap" into place through material to be fastened.

